

KL

Solar

Photovoltaic
Modules



KL75 / KL80 / KL90

KL Solar provides cost-effective photovoltaic power for general use, operating DC directly or, in an inverter-equipped system, AC loads. The 36 cells in series provides 90 watts of maximum power, it is used primarily in utility grid-supplemental systems, telecommunications, remote villages and clinics, pumping and load-based aids to navigation.

M5

&

P5

S
E
R
I
E
S



*M5 Series:
Monocrystalline modules*

*P5 Series:
Polycrystalline Modules*

Electrical and Mechanical Data



Model	KL75	KL80	KL90
Maximum power (Pmax)	75 Wp	80 Wp	90 Wp
Open Circuit Voltage (Voc)	21.5 V	21.8 V	22.3 V
Maximum power point voltage (Vmpp)	17.1 V	17.3 V	17.6 V
Short circuit current (Isc)	4.92 A	5.18 A	5.76 A
Maximum power point current (Impp)	4.39 A	4.63 A	5.12 A
Tolerance	±10%	±10%	±10%
Cell Size (mm)	125 x 125	125 x 125	125 x 125
No. of cells	36	36	36
Dimensions (mm) ± 1	1205 x 535 x 35	1205 x 535 x 35	1205 x 535 x 35
Maximum system voltage	600	600	600
Temperature co-efficient	NOCT (°C)45	NOCT (°C)45	NOCT (°C)45
α (Voc) (mV/°C)	- 105	- 105	- 105
β (Isc) (mA/°C)	- 0.32	- 0.32	- 0.32
χ (Pmax) (%/°C)	- 0.45	- 0.45	- 0.45
Weight (kgs)	7.5	7.5	7.5

Standard Test Condition : Irradiance 1,000 W/sq.m, Temperature 25deg C Air mass 1.5 spectrum)

Proven Materials and Construction

KL Solar experience shows in every aspect of this module's construction and materials

- Anodized aluminum frame offers required strength and allows for quick and easy installation on standard array structures.
- 36 Crystalline silicon solar cells in series.
- Modules are laminated in toughened low iron content PV grade glass – Ethyl Vinyl Acetate films – PV module back sheet.
- Optimized lamination process parameters ensure a stable laminate. Junction Box with PG Cable glands are standard in all modules.
- Each module is flash tested in a Sun simulator to ensure conformity to specification.

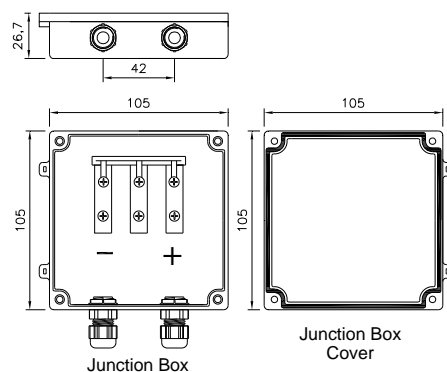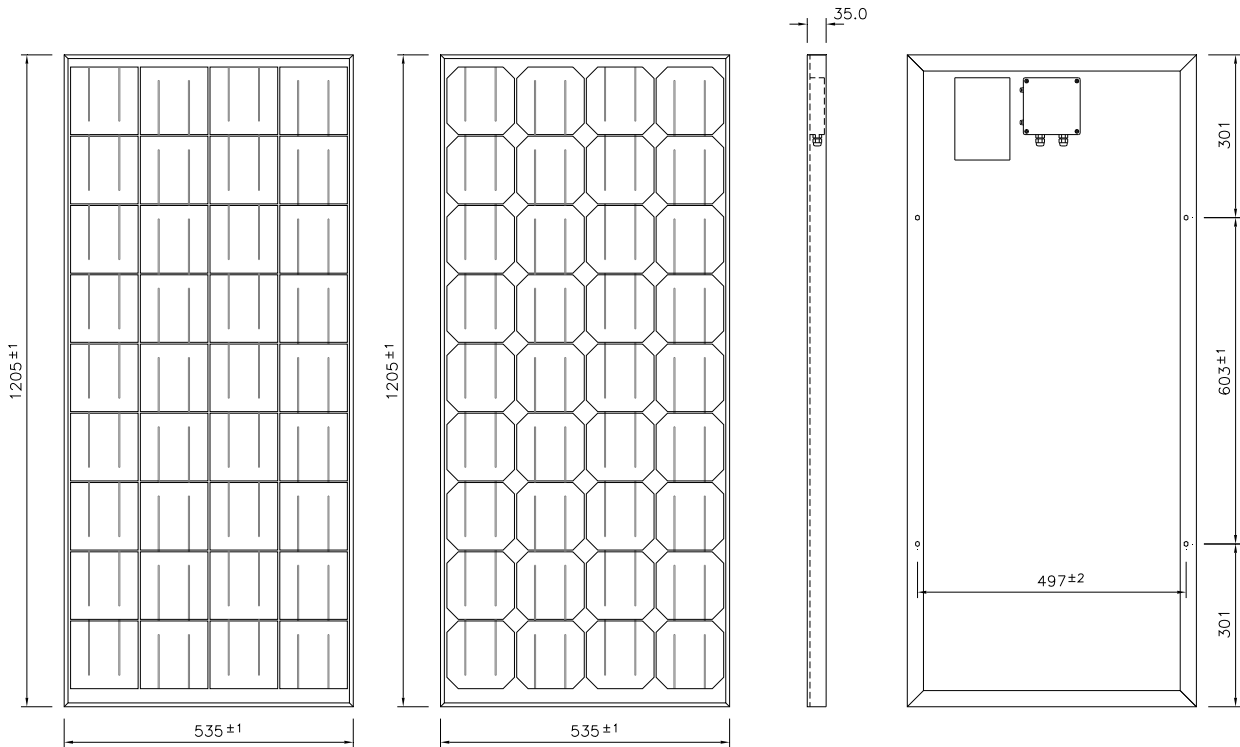

KL SOLAR COMPANY PVT LTD.,

100% Export Oriented Unit,

Coimbatore – 641 014. INDIA.

Phone : +91 422 6563638 / Fax : +91 422 2567562

email : info@klsolar.com / www.klsolar.com